



Mini type, simple type cage clamp terminal blocks / 144 series

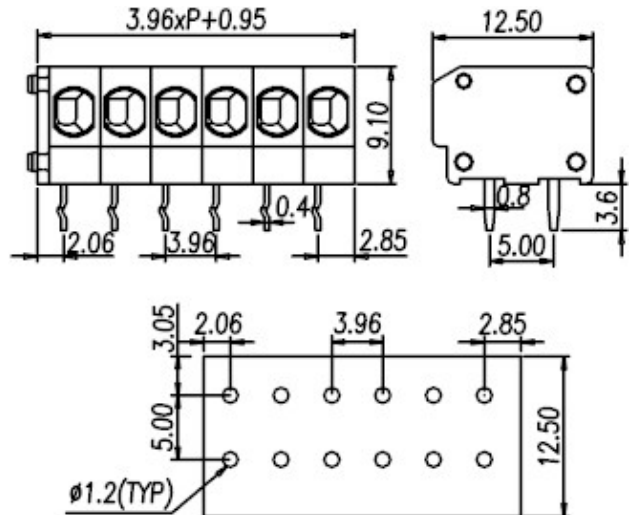

144R-..P2

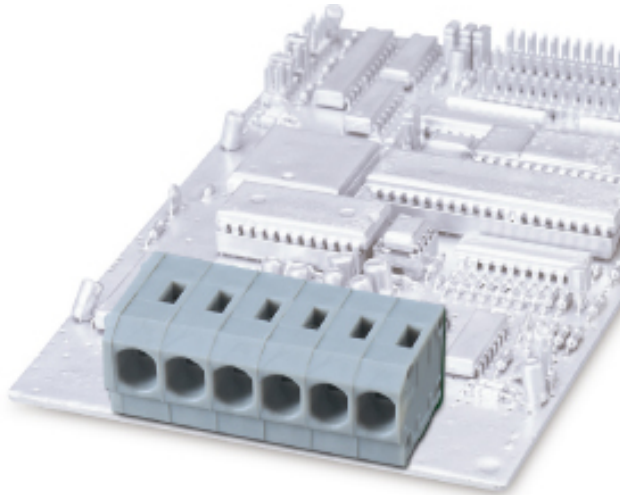

Pitch: 3.96mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	10A	17.5A
Wire range	1.5mm ²	
Solid wire (AWG)	20~14	
Stranded wire (AWG/mm ²)	20~14	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / 3.5 KV	
Torque (Lb-in)		
Wire strip length	6~7mm	
End Cover	144E	
Pole	Cat. No.	
02	144R-02P2	
:	:	
:	:	
24	144R-24P2	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw