



Spring plugs for pluggable terminal blocks / ESC & ESD series

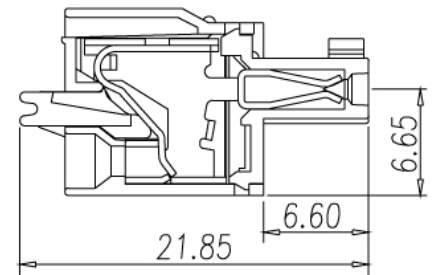

ESC508V



Pitch: 5.08mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	130V
Rated current	8A	8A
Wire range	1.5mm ²	
Solid wire (AWG)	28-14	
Stranded wire (AWG/mm ²)	28-14	
Rated surge voltage (UL/IEC/Max.)	1.3 / 1.25 / KV	
Torque (Lb-in)		
Screw		
Wire strip length	7~8mm	
Pole	Cat. No.	
02	ESC508V-02P	
:	:	
:	:	
24	ESC508V-24P	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw