


Spring plugs for pluggable terminal blocks / ESC & ESD series



**ESC508VM**

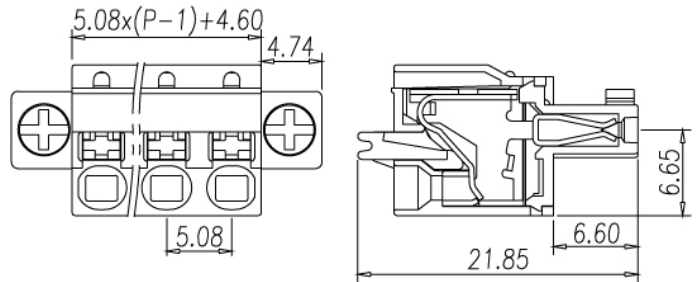

**Pitch: 5.08mm**

|                                      |                    |      |
|--------------------------------------|--------------------|------|
| Approval                             |                    |      |
| Technical Data                       | UL                 | IEC  |
| Rated voltage                        | 300V               | 130V |
| Rated current                        | 8A                 | 8A   |
| Wire range                           | 1.5mm <sup>2</sup> |      |
| Solid wire (AWG)                     | 28~14              |      |
| Stranded wire (AWG/mm <sup>2</sup> ) | 28~14              |      |
| Rated surge voltage (UL/IEC/Max.)    | 1.3 / 1.25 / KV    |      |
| Torque (Lb-in)                       |                    |      |
| Screw                                |                    |      |
| Wire strip length                    | 7~8mm              |      |
| Pole                                 | Cat. No.           |      |
| 02                                   | ESC508VM-02P       |      |
| :                                    | :                  |      |
| :                                    | :                  |      |
| 24                                   | ESC508VM-24P       |      |

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** [infor@dinkle.com.tw](mailto:infor@dinkle.com.tw)